


Anziehvorschrift Zylinderkopf	696.480 passend für / suitable for adaptable à / adaptable a GM	 Das Original
Tightening Instructions for Cylinder Head		
Instructions de serrage pour culasse		
Prescripciones de apriete para culatas		

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo

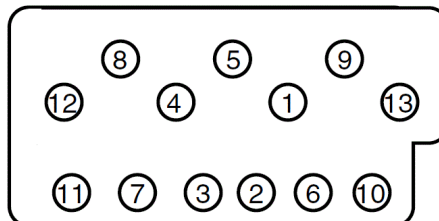

Anziehen/ Tightening/ Serrage/ Apriete	1985-1993&1992-1995VIN ⚙ 65 ft-lb in three steps	1994-2014 ⚙ 22 ft-lb ➤ Long bolts 75° ➤ Medium bolts 65° ➤ Short bolts 55°
---	---	--

Zeichenerklärung / Explanations / Explication / Explicacion

	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

1985-2014 4.3L V6 262cid
Chevrolet Blazer, Astro, C10, C20, K10, K20, R10
GMC Silverado 1500, Jimmy, K1500, K2500,
GMC Savana, Sierra, Sonoma
ISUZU Hombre
Oldsmobile Bravada
Pontiac Bonneville, Grand Prix, Parisienne

Elring-Serviceteam
Fon +49 7123 724 799
Fax +49 7123 724 798
service@elring.de

26/06/25

696.480