

## Anziehvorschrift Zylinderkopf

## Tightening Instructions for Cylinder Head

## Instructions de serrage pour culasse

## Prescripciones de apriete para culatas

732.170

passend für / suitable for  
adaptable à / adaptable a

PSA / Ford




Das Original

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo



267.551  
M 12x1,5x121

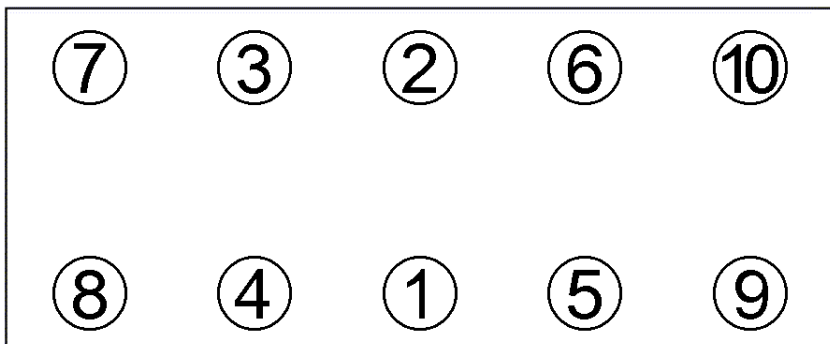

Anziehen/  
Tightening/  
Serrage/  
Apriete

22 Nm  
60 Nm  
➤ 220°

## Zeichenerklärung / Explanations / Explication / Explicacion

|  |                                                |                                 |                                   |                                          |
|--|------------------------------------------------|---------------------------------|-----------------------------------|------------------------------------------|
|  | neue Zylinderkopf-<br>schrauben verwenden      | use new cylinder head<br>bolts  | utiliser des vis neuves           | emplar tornillos nuevos                  |
|  | Warmlauf (80°C)                                | warm up time (80°C)             | chauffage (80°C)                  | calentamiento (80°C)                     |
|  | Schrauben einzeln lösen<br>und wieder anziehen | loosen and tighten each<br>bolt | deserrer et serrer<br>vis par vis | aflojar y apretar<br>tornillo a tornillo |
|  | Setzzeit                                       | relaxation time                 | durée de tassement                | tiempo de espera                         |
|  | Drehwinkel                                     | torque angle                    | angle de serrage                  | ángulo de giro                           |

## Motortyp / Engine type / Type de moteur / Tipo de motor

Ø: 85,9 mm; ÷: 1,30 mm

Mot.      4HT, DW12BTED4, Q4BA  
2,2 ltr.HDI / TDCI / TD4

C5, C6, C8, 407, 607, 807      ab 04/06>  
Galaxy, Mondeo, S-Max      ab 03/08>  
Freelander      ab 10/06>

## Elring-Serviceteam

Fon +49 7123 724 799  
Fax +49 7123 724 798  
[service@elring.de](mailto:service@elring.de)

26/06/25

**\*732.170\***