



Anziehvorschrift Zylinderkopf	764.720 passend für / suitable for adaptable à / adaptable a Mercedes-Benz	 Das Original
Tightening Instructions for Cylinder Head		
Instructions de serrage pour culasse		
Prescripciones de apriete para culatas		

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo



819.956
M 12x1,75x119

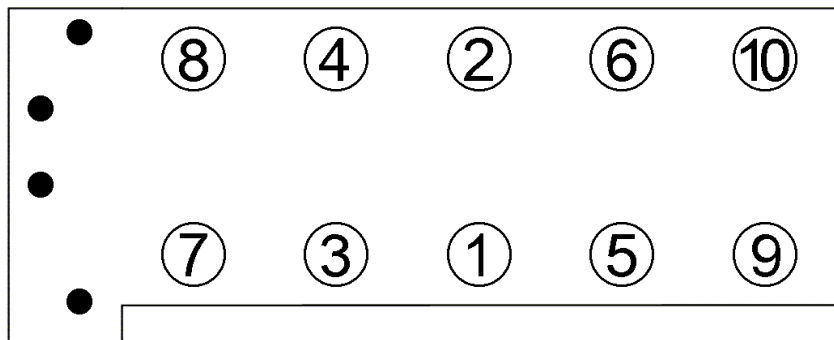

Anziehen/
Tightening/
Serrage/
Apriete

M 12
 55 Nm
➤ 90°
➤ 90°

M 8 bis 1984
 25 Nm

M 8 ab 1985
 21 Nm

Zeichenerklärung / Explanations / Explication / Explicacion

	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Mot. 102.942/943/945/946/958/959/979-982/985/
987/989/996-998
190 E 2.3 (W 201) 1986>
230 E/CE/TE (W 123) 6/1980>12/1985

Elring-Serviceteam
Fon +49 7123 724 799
Fax +49 7123 724 798
service@elring.de

26/06/25

764.720