



Finden Sie die passende Zylinderkopfdichtung für die
2.0 bis 2.4 Liter D3/D4/D5-Motoren von VOLVO


D 5204 | D 5244

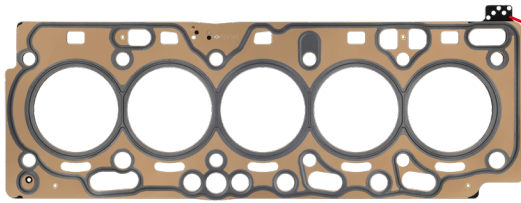


524.545





Elring-Nr.	Einbau- dicke	Loch- anzahl	OE-Nr.	Motorenbaureihen	
524.555	1,30 mm	2	30 757 865 31 359 305 31 362 215 31 392 325	D 5204 T	
524.545	1,20 mm	4	30 757 864 31 336 214 31 359 304 31 392 324	D 5204 T2 D 5204 T3 D 5204 T4	
524.535	1,15 mm	3	30 757 863 31 336 213 31 359 303 31 392 323	D 5204 T5 D 5204 T6	
524.525	1,10 mm	2	30 757 862 31 336 212 31 359 302 31 392 322	D 5204 T7 D 5244 T14	
524.515	1,05 mm	1	30 757 861 31 336 211 31 359 301 31 392 321	D 5244 T19	

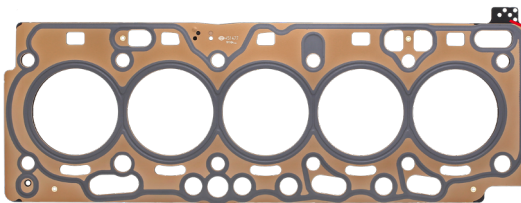

451.477



Elring-Nr.	Einbau- dicke	Loch- anzahl	Kolbenüberstand ab	OE-Nr.	Motorenbaureihen	
451.577	1,30 mm	2	0,62 bis 0,74 mm	31 392 315	D 5244 T10 D 5244 T11 D 5244 T12	
451.477	1,20 mm	4	0,57 bis 0,62 mm	31 392 314	D 5244 T15 D 5244 T16 D 5244 T17	
451.457	1,15 mm	3	0,52 bis 0,57 mm	31 392 313	D 5244 T20 D 5244 T21 D 5244 T22	
451.447	1,10 mm	2	0,47 bis 0,52 mm	31 392 312	D 5244 T23 D82PHEV D87PHEV	
451.387	1,05 mm	1	0,26 bis 0,47 mm	31 392 311	D97PHEV	



D 5204



D 5244

ElringKlinger AG | Geschäftsbereich Ersatzteile

Max-Eyth-Straße 2 | 72581 Dettingen/Erms | Deutschland

Fon +49 7123 724-799

service@elring.com | www.elring.de

TS1 01/2026



Das Original