

Anziehvorschrift Zylinderkopf

Tightening Instructions for Cylinder Head

Instructions de serrage pour culasse

Prescripciones de apriete para culatas

651.590


passend für / suitable for
adaptable à / adaptable a

Jeep



Das Original

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo

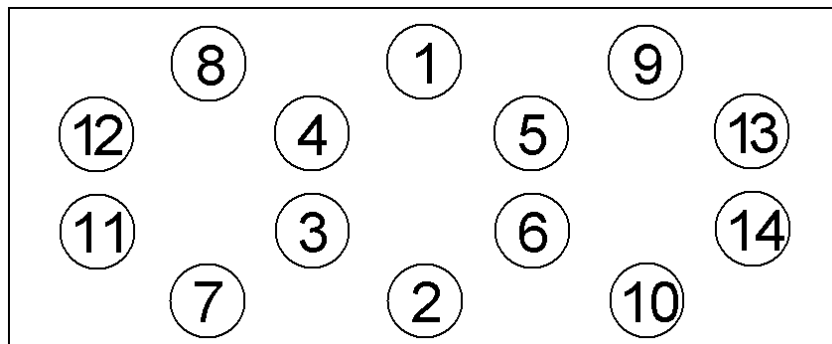

Anziehen/
Tightening/
Serrage/
Apriete



22 lb-ft

45 lb-ft

45 lb-ft

1-10+12-14 / 110 lb-ft

11 / 100 lb-ft



30 Nm

60 Nm

60 Nm

1-10+12-14 / 150 Nm

11 / 135 Nm

Zeichenerklärung / Explanations / Explication / Explicacion

	neue Zylinderkopf- schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Jeep Cherokee 2001-1999 4.0L L6 242cid

Jeep Grand Cherokee 2003-1999 4.0L L6 242cid

Jeep TJ 2003-2000 4.0L L6 242cid

Jeep Wrangler 2003-2000 4.0L L6 242cid

Elring-Serviceteam

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

26/06/25

651.590